



TECHNICAL NEWS

TOBAGO pág.4



CAYMAN pág.6



CAYMAN pág.6



MURAL pág.8



GARDA pág.10



NEPTUNO pág.12



SAL pág.14



FIJI pág.15



CARRÍLES MONÓFASICO pág.16



FLORÓN EMPOTRAR pág.18



ARCS pág.20



DAVOS XL pág.22



KANDANCHÚ pág.25



KANDANCHÚ pág.24



VOLCANO pág.26



RELAX pág.28



RELAX pág.30




TOBAGO


Aplique-Wall lamp

Indoor

CRI≥90

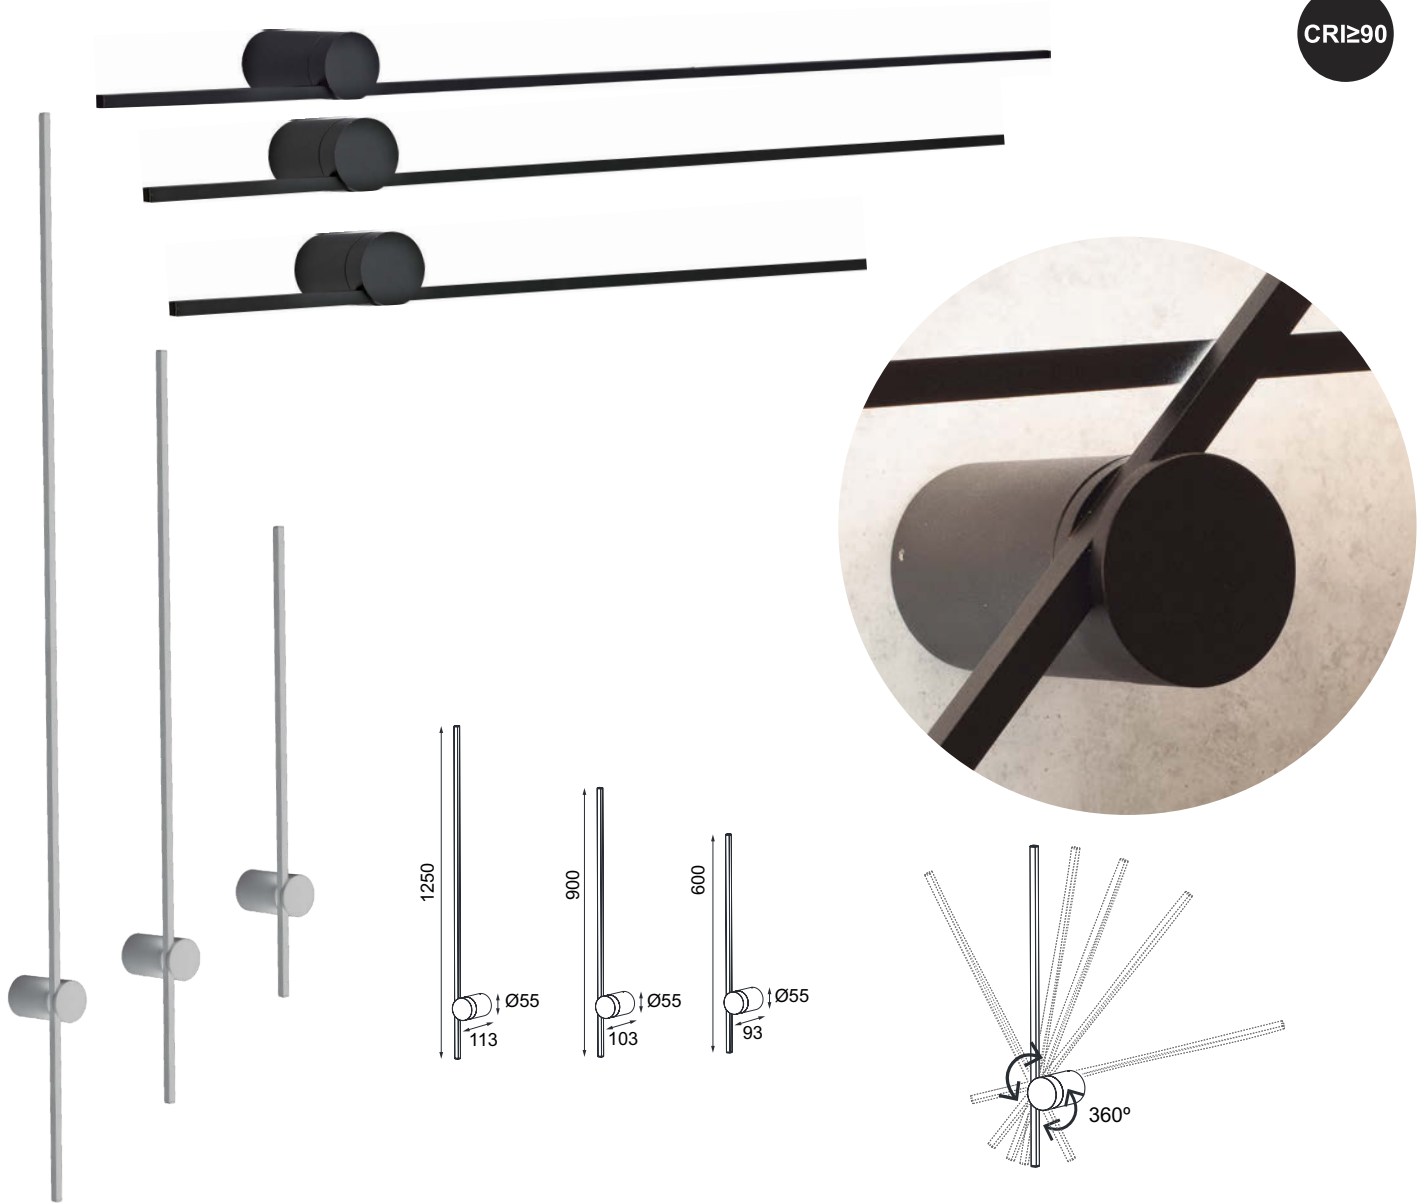

	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7910	3000K	7W	590lm	Blanco-White
New	7913	3000K	7W	590lm	Negro-Black
New	7911	3000K	9W	760lm	Blanco-White
New	7914	3000K	9W	760lm	Negro-Black
New	7912	3000K	12W	1010lm	Blanco-White
New	7915	3000K	12W	1010lm	Negro-Black
bridgelux		On-off	220-240V~ 50/60Hz CRI:≥ 90		Aluminio-Aluminium

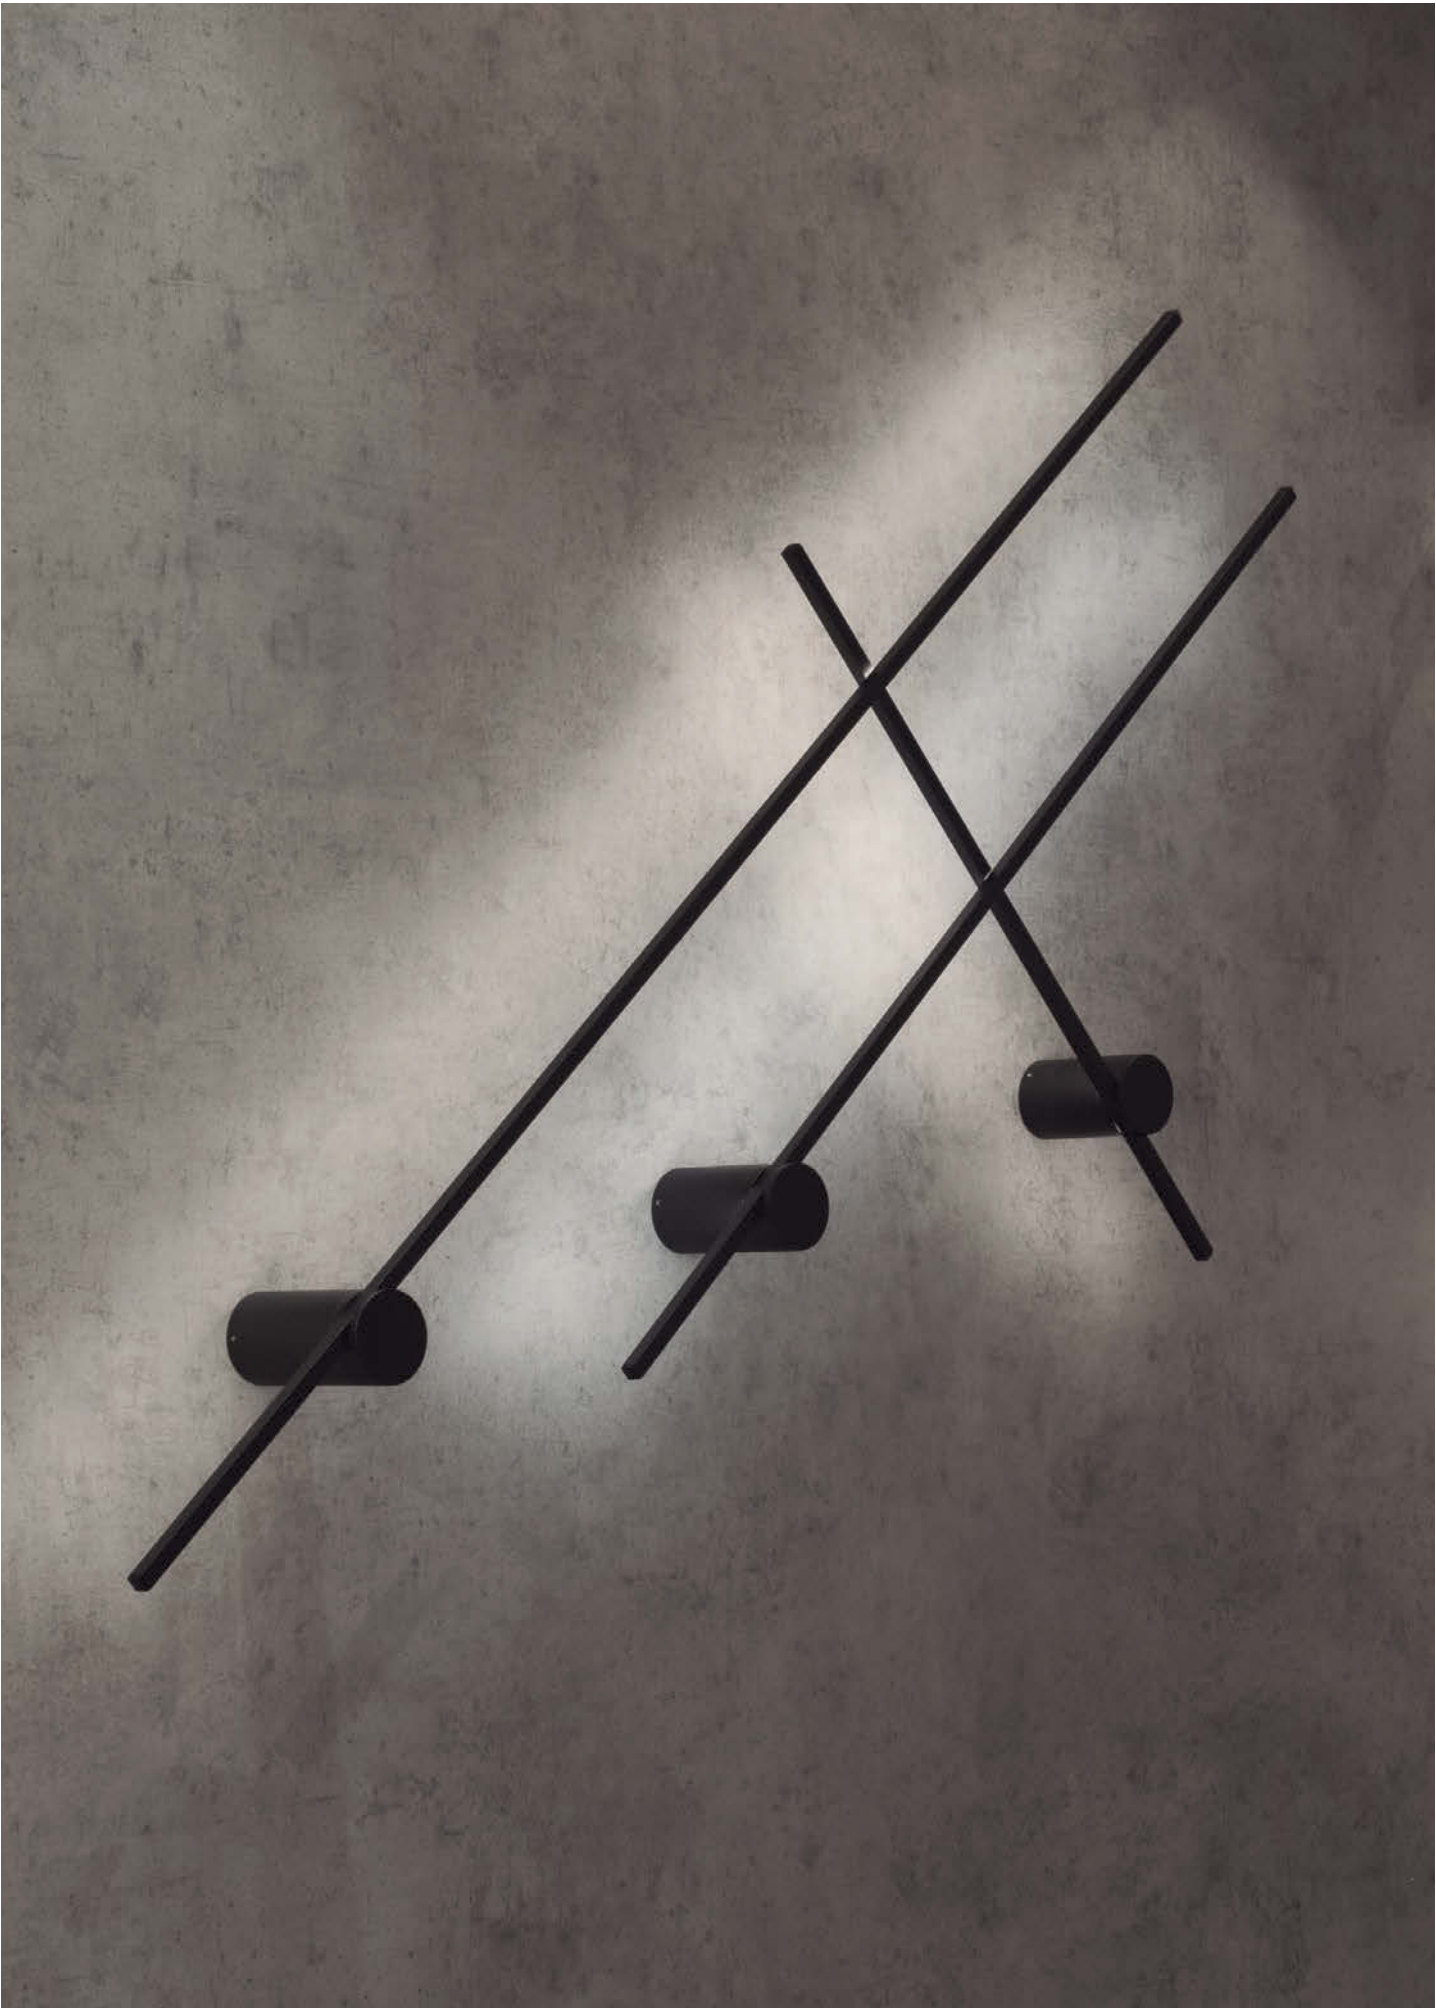

CAYMAN

Aplique-Wall lamp


Indoor




	REFERENCE	K	LED WATT	LUMENS	FINISH
	6080	3000K	3+6 W	210+410lm	Blanco mate-Matt white
	6081	3000K	3+6 W	210+410lm	Níquel satinado-Satin nickel
	6082	3000K	3+6 W	210+410lm	Cuero-Antique brass
	6083	3000K	3+6 W	210+410lm	Negro mate-Matt black
New	7853	3000K	3+6 W	210+410lm	Oro-Gold
SAMSUNG E DISON		on-off	220-240V ~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium






	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7823	3000K	3+6 W	210+410lm	Blanco mate-Matt white
New	7824	3000K	3+6 W	210+410lm	Níquel satinado-Satin nickel
New	7825	3000K	3+6 W	210+410lm	Cuero-Antique brass
New	7826	3000K	3+6 W	210+410lm	Negro mate-Matt black
New	7854	3000K	3+6 W	210+410lm	Oro-Gold
SAMSUNG E DISON		on-off	220-240V ~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium

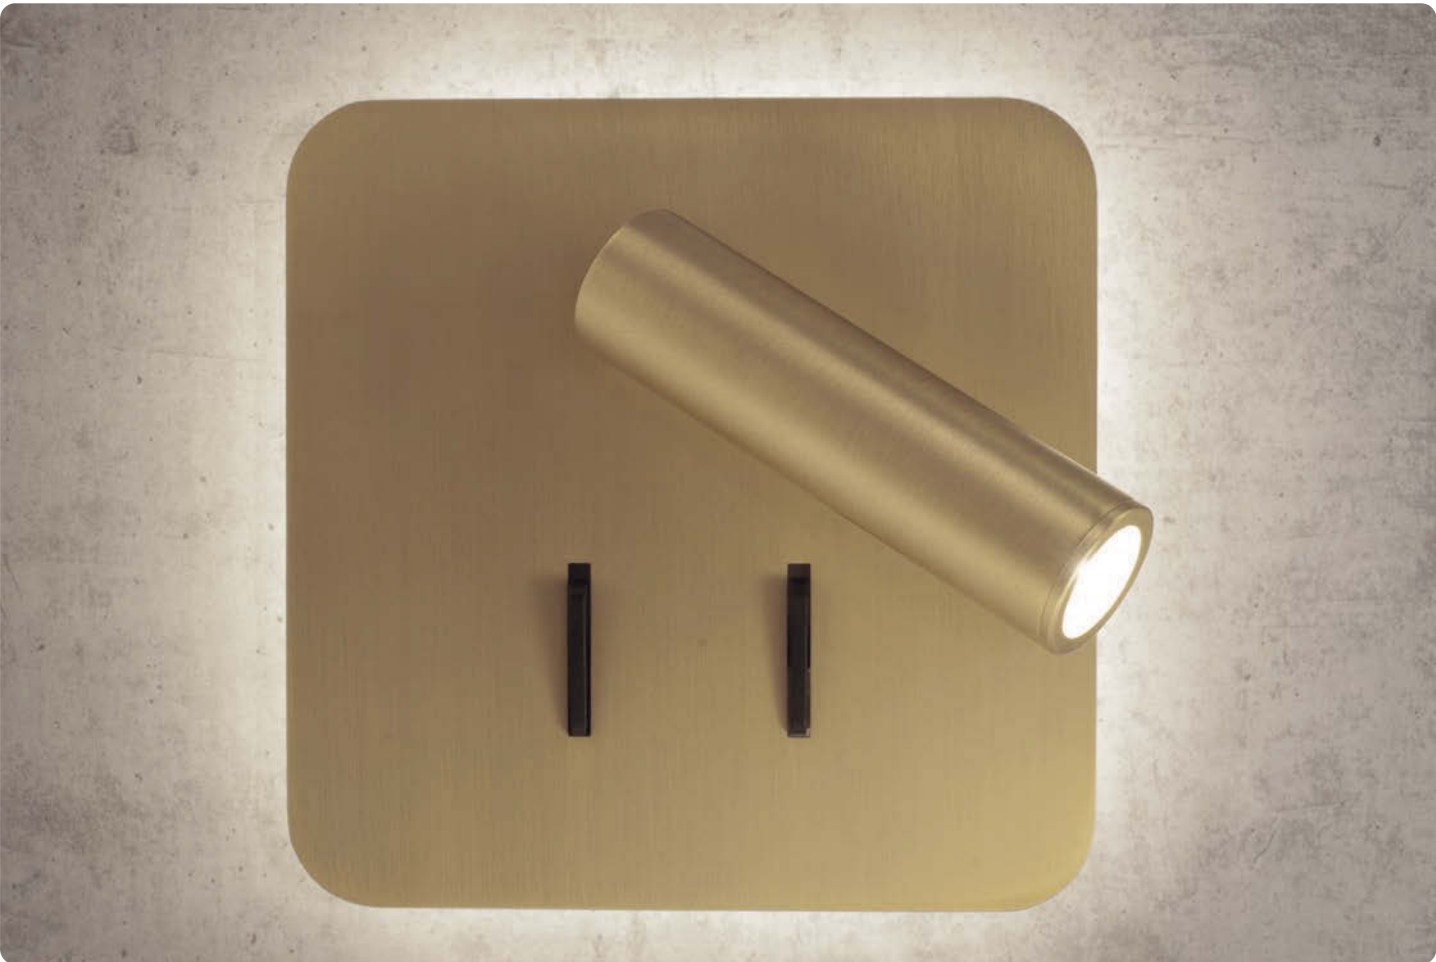



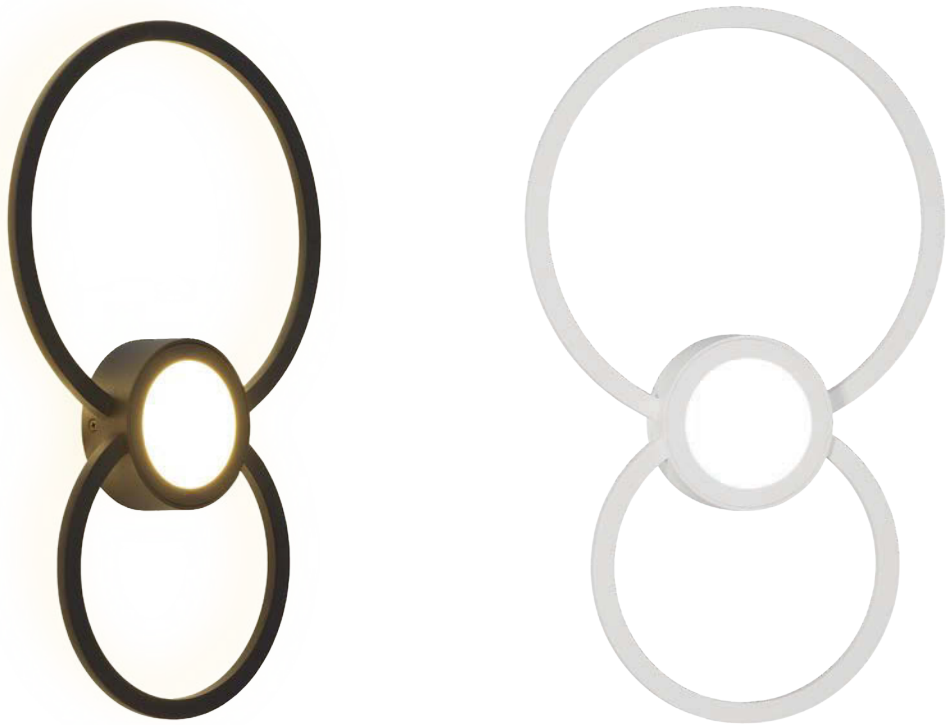



REFERENCE	K	LED WATT	LUMENS	FINISH	
6230	3000K	24W	1440lm	Blanco mate-Matt white	On-off
7460	3000K	24W	1440lm	Negro mate-Matt black	On-off
New 7840	3000K	24W	1440lm	Blanco mate-Matt white	Dimmable
New 7841	3000K	24W	1440lm	Negro mate-Matt black	Dimmable
		100-250V~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium	

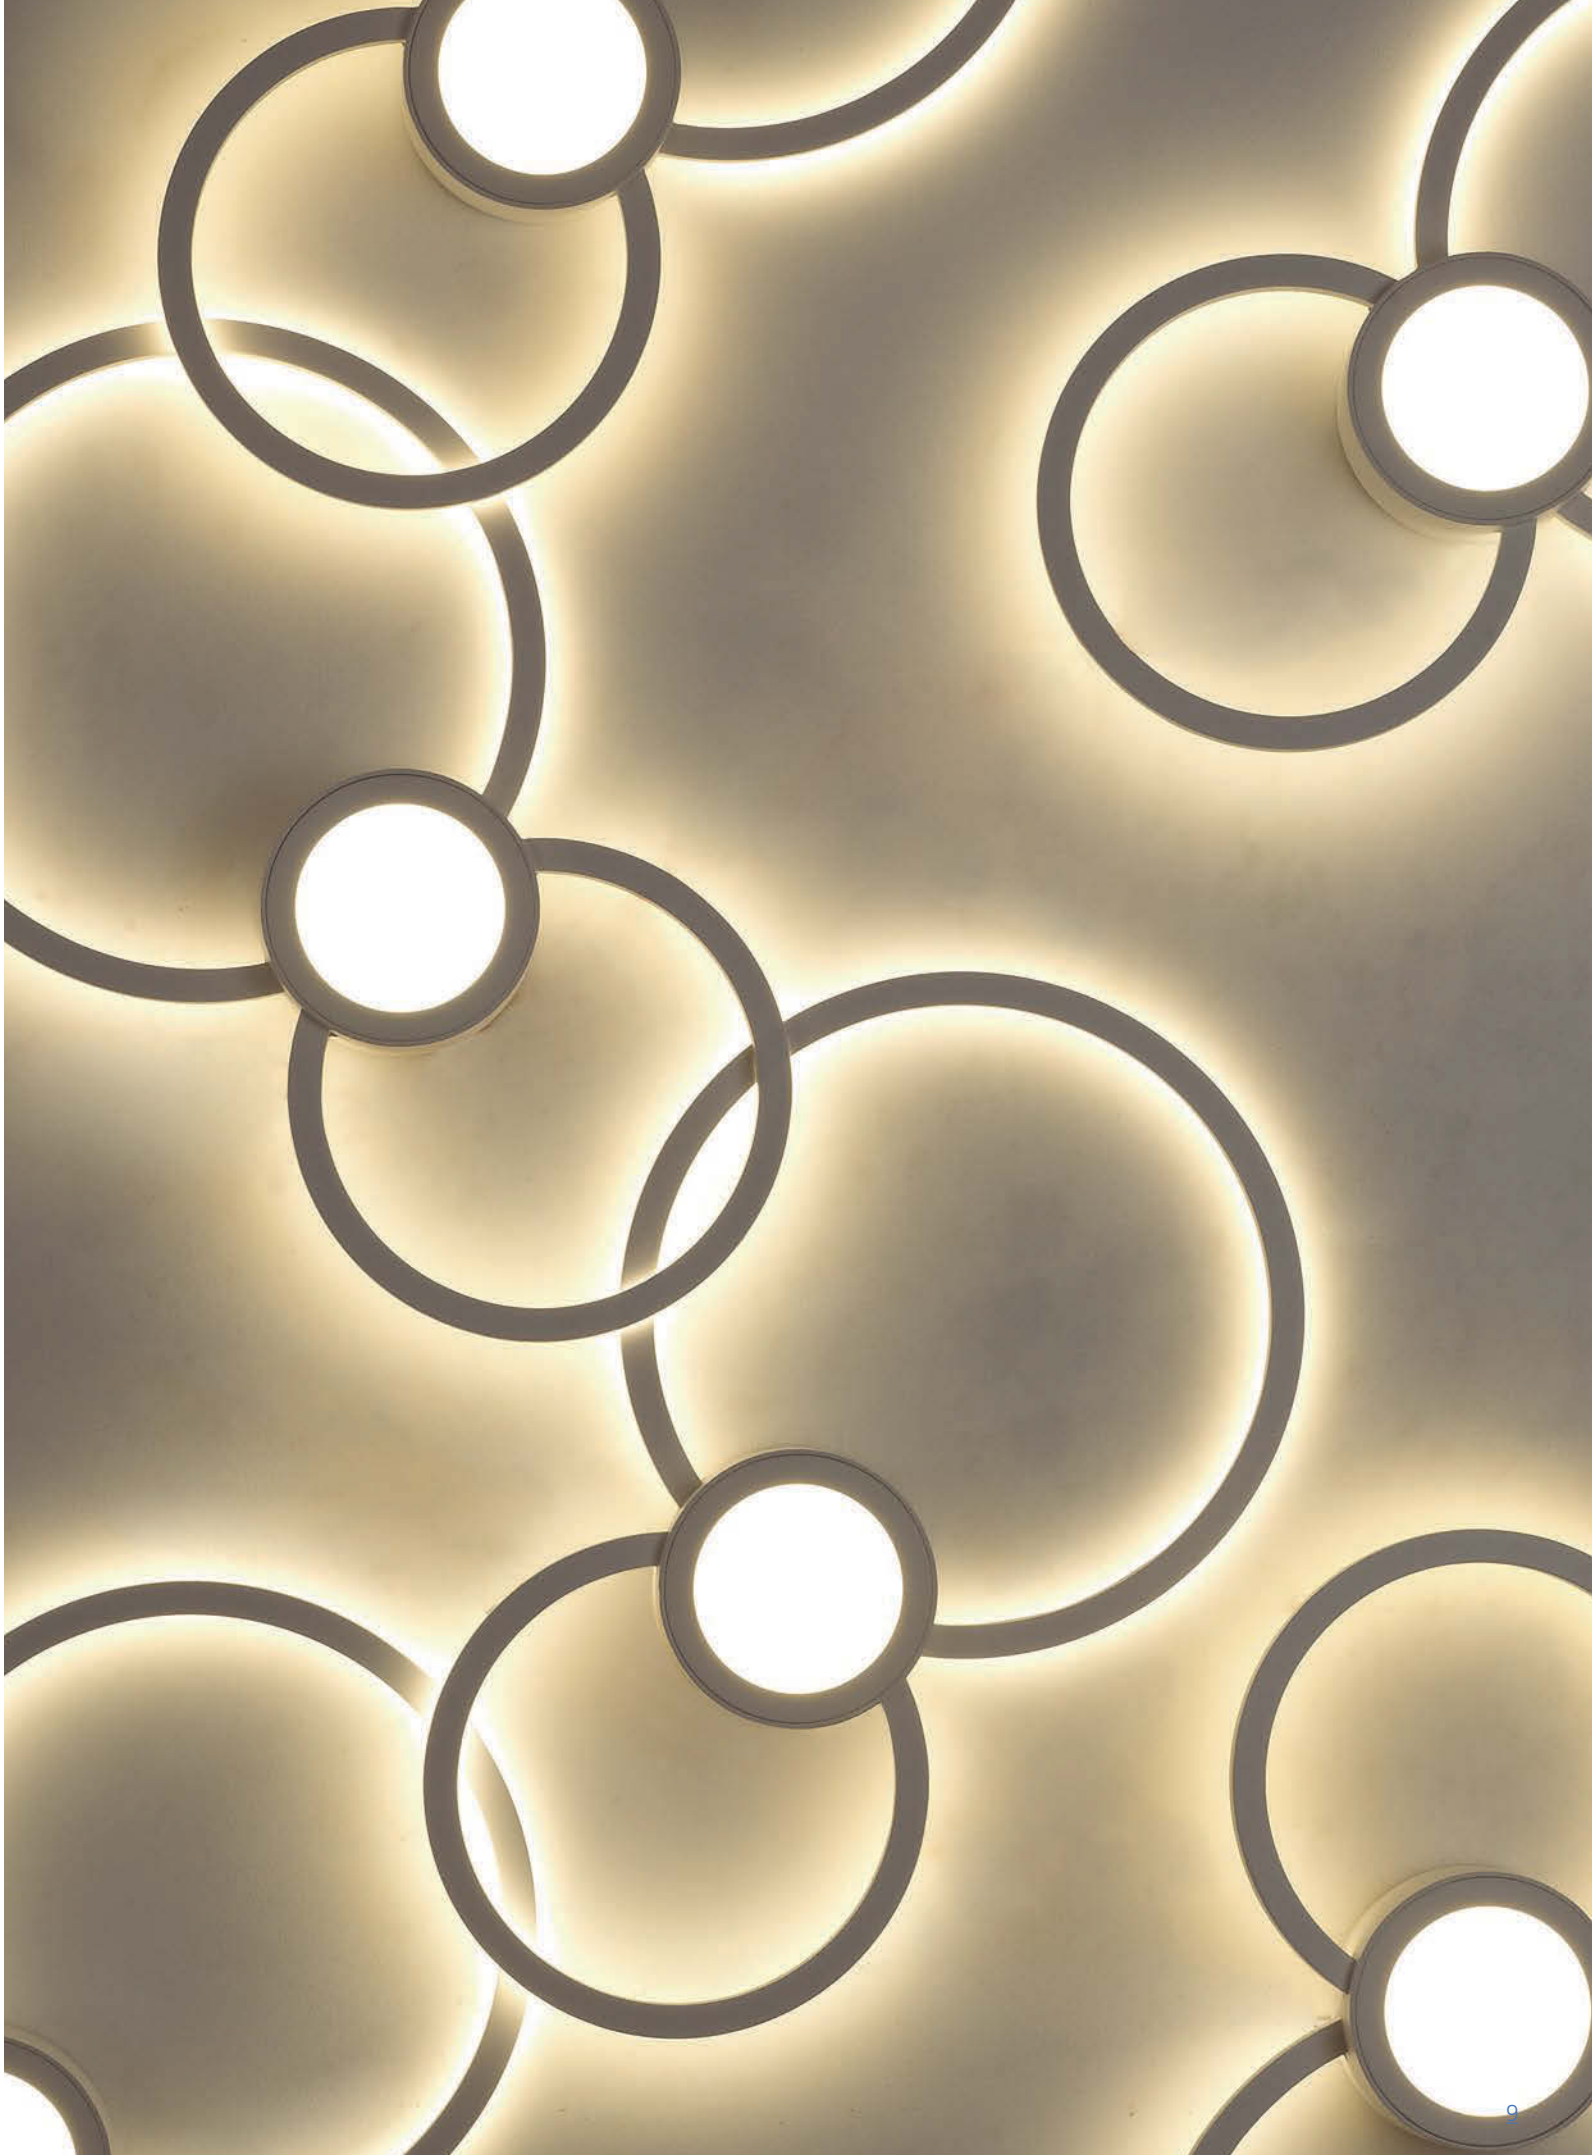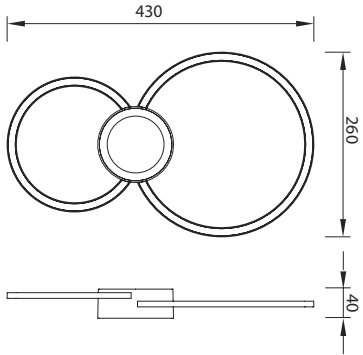


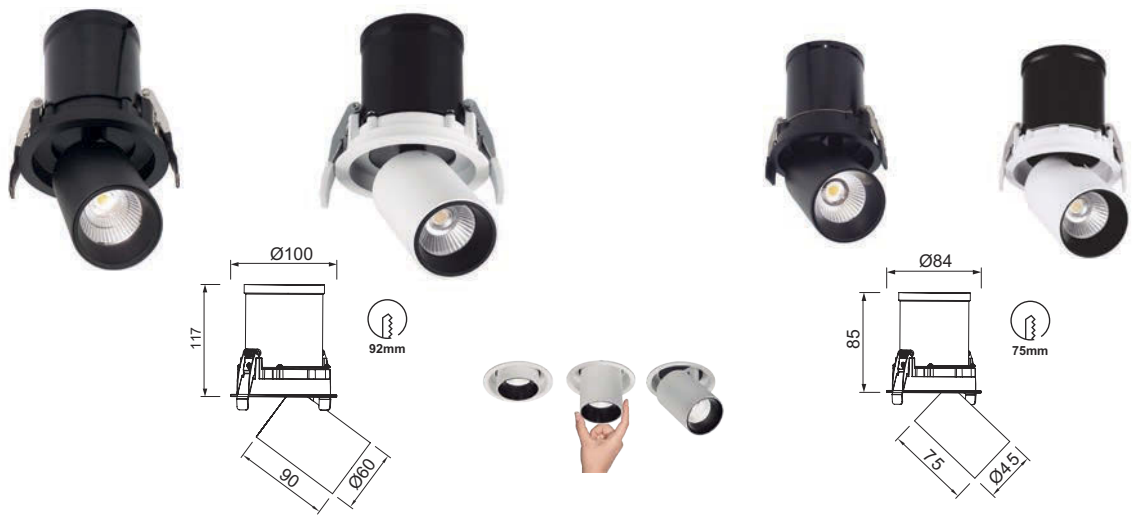


	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7829	2700K	7W	610lm	Blanco-White
New	7831	2700K	7W	610lm	Negro-Black
	6400	3000K	7W	610lm	Blanco-White
New	7833	3000K	7W	610lm	Negro-Black
	6401	4000K	7W	630lm	Blanco-White
New	7830	2700K	12W	1020lm	Blanco-White
New	7832	2700K	12W	1020lm	Negro-Black
	6402	3000K	12W	1020lm	Blanco-White
New	7834	3000K	12W	1020lm	Negro-Black
	6403	4000K	12W	1080lm	Blanco-White
	CREE	on-off	220-240V ~ 50/60Hz	Aluminio ABS - Aluminium	

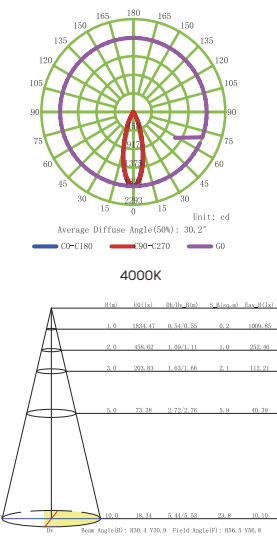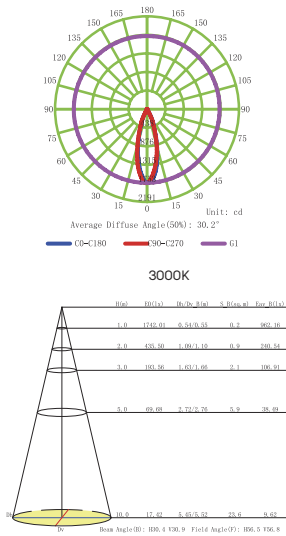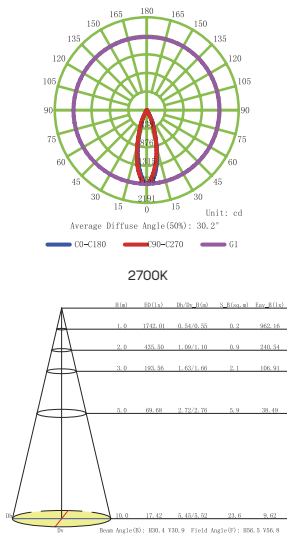

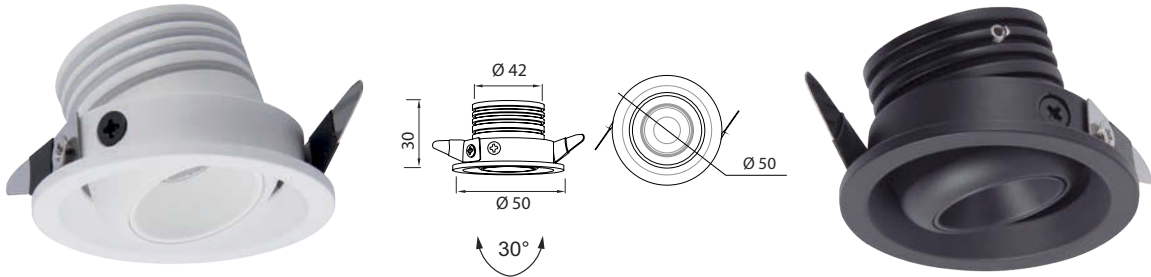


	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7827	2700K	3W	210lm	Blanco-White
New	7828	2700K	3W	210lm	Negro-Black
	7451	3000K	3W	210lm	Blanco-White
	7453	3000K	3W	210lm	Negro-Black
	7452	4000K	3W	220lm	Blanco-White
	7454	4000K	3W	220lm	Negro-Black
	OSRAM	on-off	100-240V~ 50/60Hz CRI:≥ 90		Aluminio-Aluminium

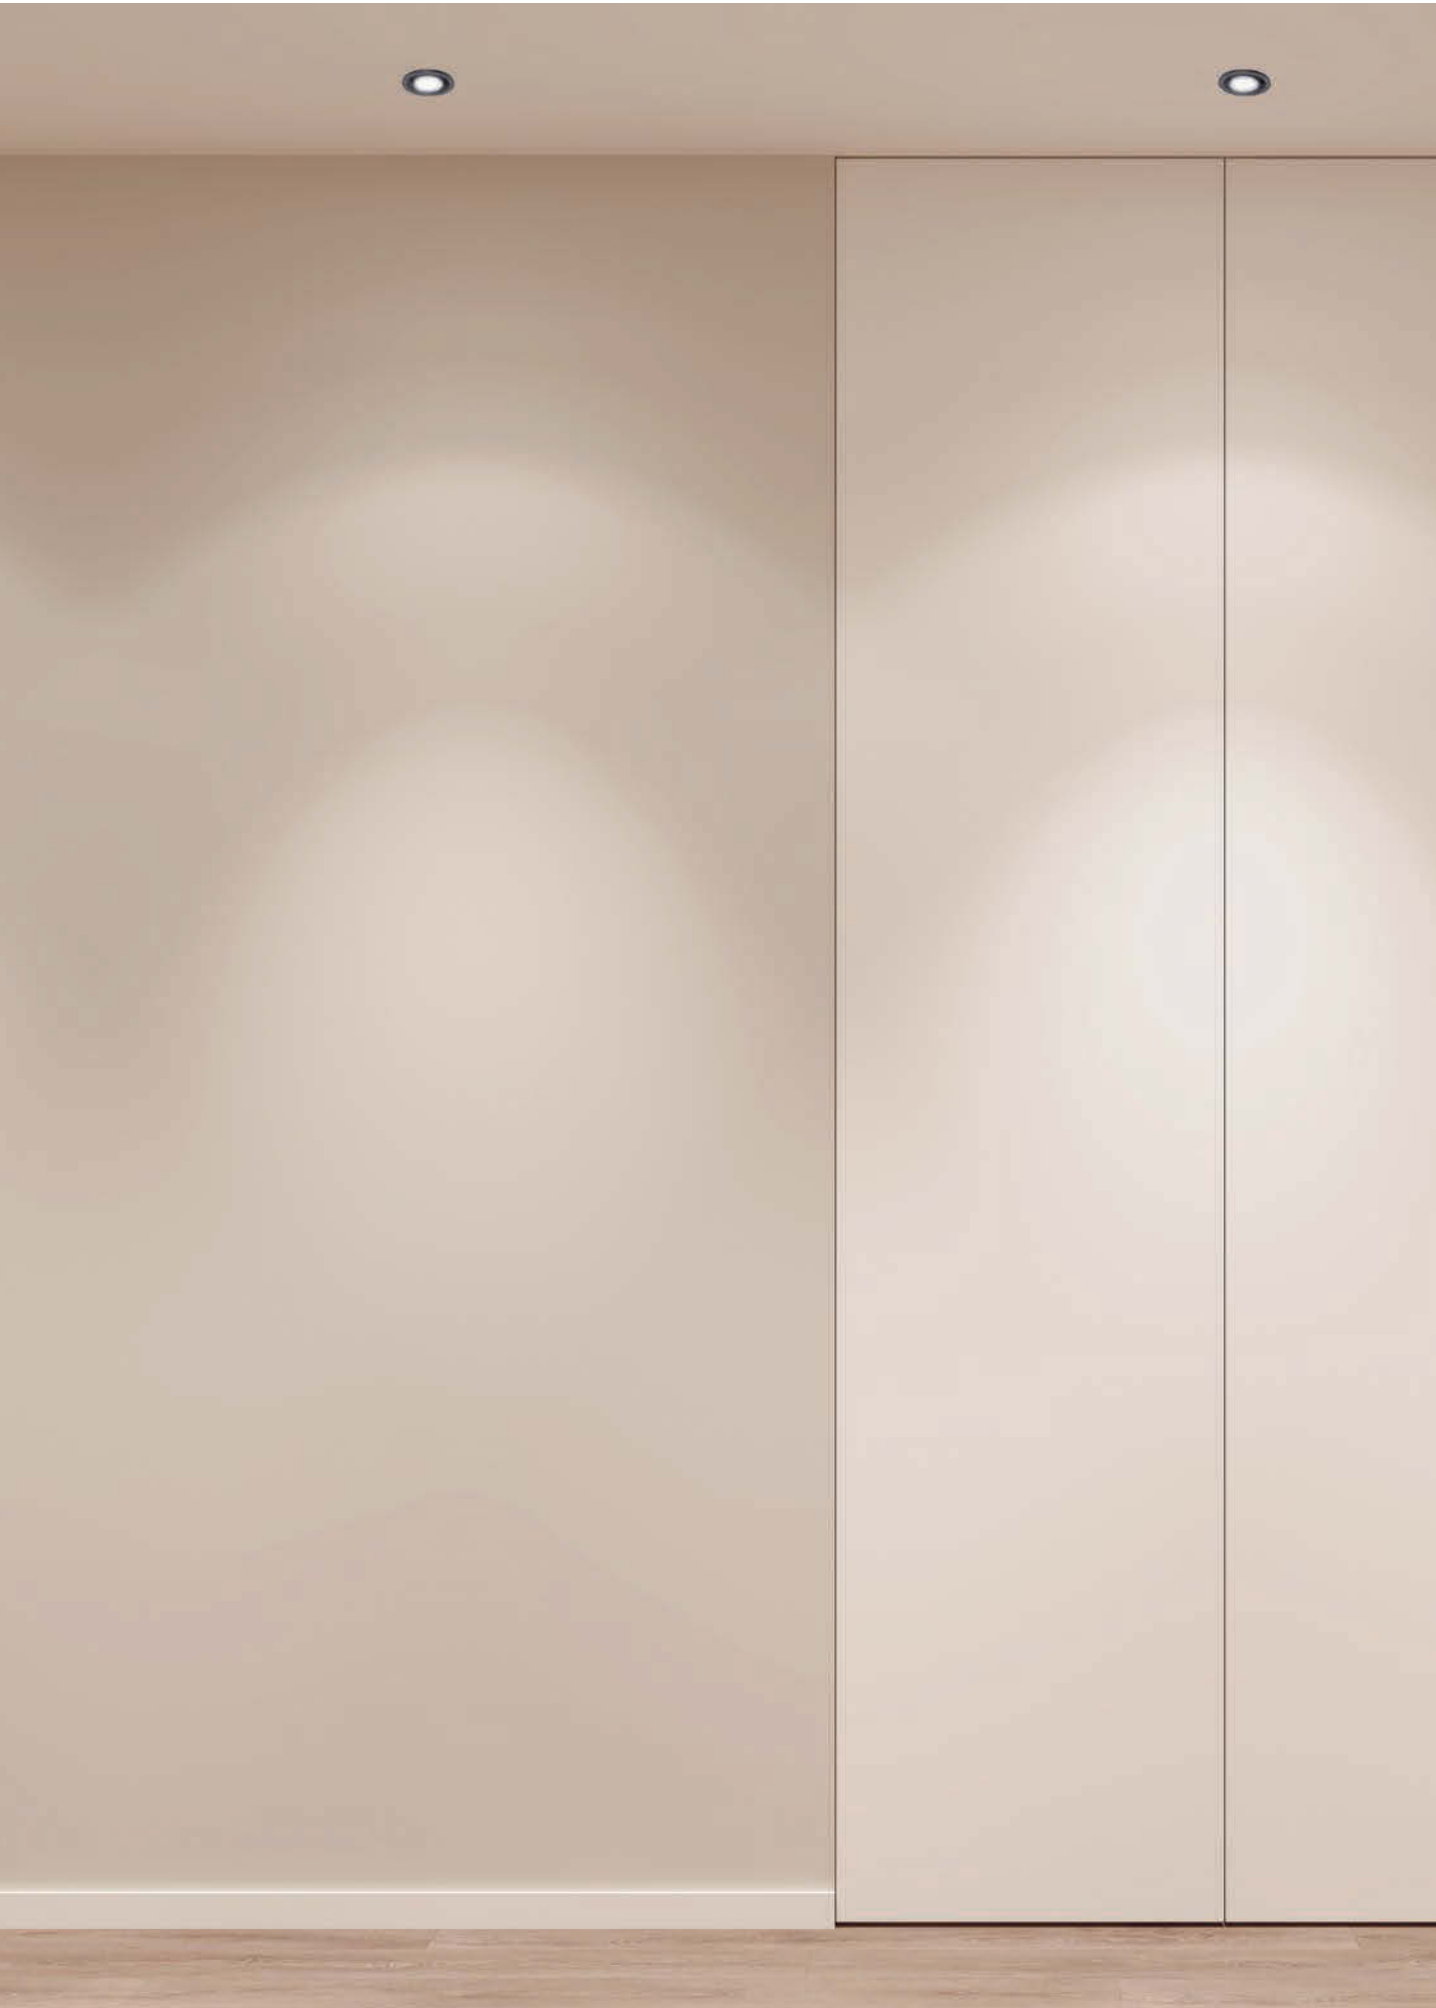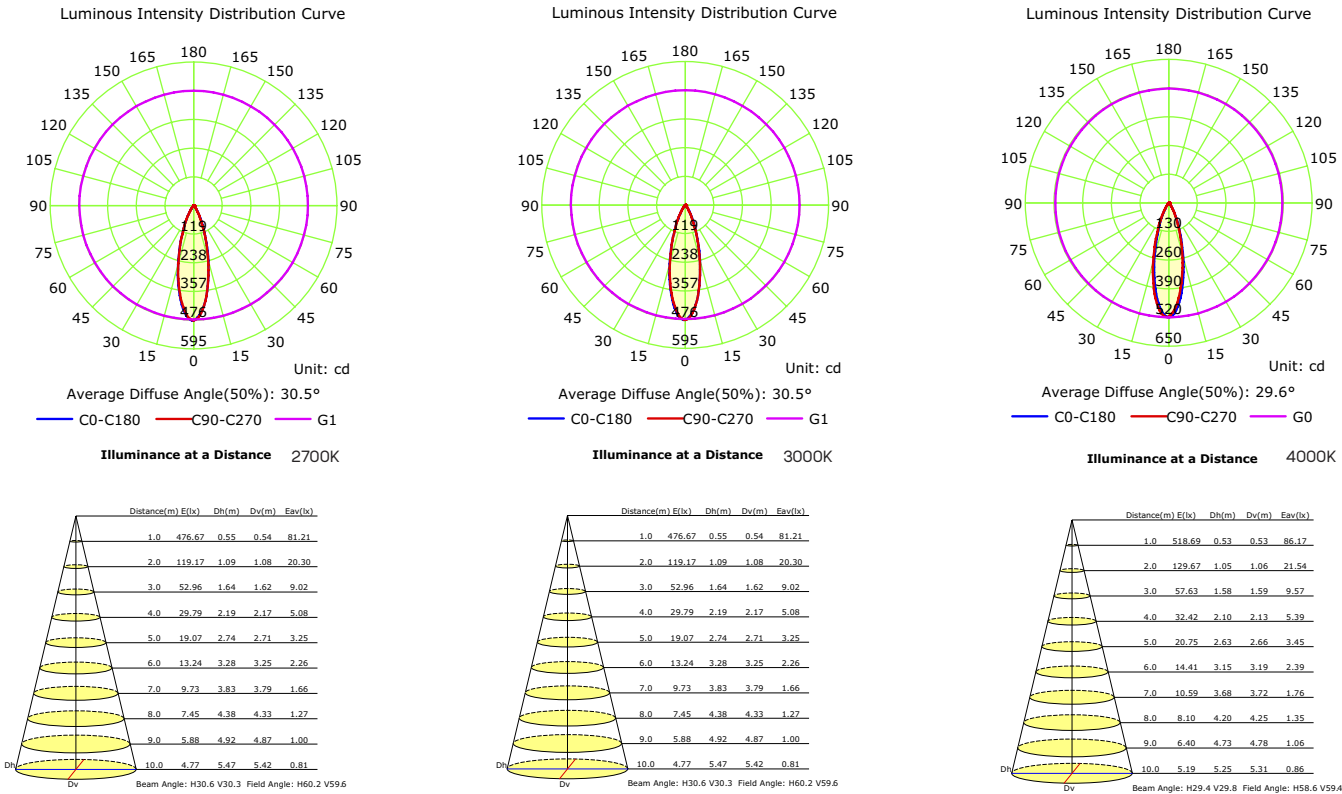

SAL
monofásico

Foco carril monofásico-Single-phase rail spot

Indoor

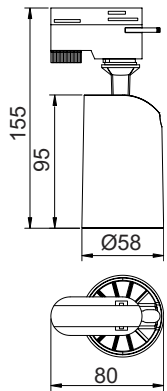

REFERENCE	BULB NO INCLUDED	FINISH
New 7843	GU10	Blanco-White
New 7844	GU10	Negro-Black
	on-off	100-240V ~ 50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs


REFERENCE	Wattios LED	CCT	Lumens	Ángulo luz
R09196	6W	3000K	520lm	110°
R09214	6W	4000K	540lm	110°
R09197	6W	5000K	540lm	110°



FIJI
monofásico

Foco carril monofásico-Single-phase rail spot

CRI≥90

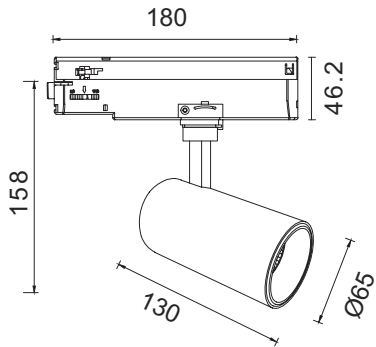

REFERENCE	K	LED WATT	LUMENS	FINISH
New 7845	3000K	15W	1500lm	Blanco-White
New 7846	4000K	15W	1650lm	Blanco-White
New 7847	3000K	15W	1500lm	Negro-Black
New 7848	4000K	15W	1650lm	Negro-Black
New 7849	3000K	20W	2000lm	Blanco-White
New 7850	4000K	20W	2200lm	Blanco-White
New 7851	3000K	20W	2000lm	Negro-Black
New 7852	4000K	20W	2200lm	Negro-Black
bridgelux	on-off	220-240V ~ 50/60Hz CRI: ≥ 90		Aluminio-Aluminium

* Reflector-Optic

REFERENCE	BEAM ANGLE	INCLUDED
7216	15°	not included
7217	24°	not included
7218	38°	Included



15°



24°



*38°




CARRIL DE SUPERFICIE-SURFACE MOUNTED TRACK

GB21002 Negro-Black

GB21003 Blanco-White


Track length 1000 mm



GB22002 Negro-Black

GB22003 Blanco-White

Track length 2000 mm




CARRIL DE EMPOTRAR-RECESSED TRACK

GBF21002 Negro-Black

GBF21003 Blanco-White


Track length 1000 mm



GBF22002 Negro-Black

GBF22003 Blanco-White


Track length 2000 mm



FINAL ALIMENTADOR POLARIDAD DERECHA-END FEED POLARITY RIGHT

GB112 Negro-Black


GB113 Blanco-White



FINAL ALIMENTADOR POLARIDAD IZQUIERDA-END FEED POLARITY LEFT

GB122 Negro-Black


GB123 Blanco-White



TAPA FINAL-END CAP

GB412 Negro-Black


GB413 Blanco-White



ALIMENTADOR INTERMEDIO RECTO-MIDDLE FEED STRAIGHT

GB142 Negro-Black


GB143 Blanco-White



CONECTOR INTERMEDIO RECTO-MIDDLE STRAIGHT CONNECTOR

GB212 Negro-Black


GB213 Blanco-White



CONECTOR ESQUINA AJUSTABLE-ADJUSTABLE CORNER CONNECTOR

GB242 Negro-Black



GB243 Blanco-White



CONEXIÓN ALIMENTADOR EN L-POLARIDAD INTERNA L-FEED POLARITY INTERNAL

GB342 Negro-Black



GB343 Blanco-White



CONEXIÓN ALIMENTADOR EN L-POLARIDAD EXTERNA L-FEED POLARITY EXTERNAL

GB352 Negro-Black

GB353 Blanco-White



ACCESORIOS PARA CARRILES EMPOTRADOS- RECESSED TRACK ACCESSORIES

Placa para cubrir;

GB112 / GB122 / GB142



Placa para cubrir;

GB342 / GB352



GBF102 Negro-Black

Cover Plate for;

GBF302 Negro-Black

Cover Plate for;


GB113 / GB123 / GB143



GB343 / GB353



GBF103 Blanco-White



GBF303 Blanco-White






FLORÓN
empotrable

Base empotrada para colgantes-Recessed base for pendants

Indoor



REFERENCE		FINISH
New	7855	Blanco-White
New	7856	Negro-Black
New	7857	Plata-Silver
New	7858	Oro-Gold
New	7859	Cuero-Antique Brass
		Hierro-Iron

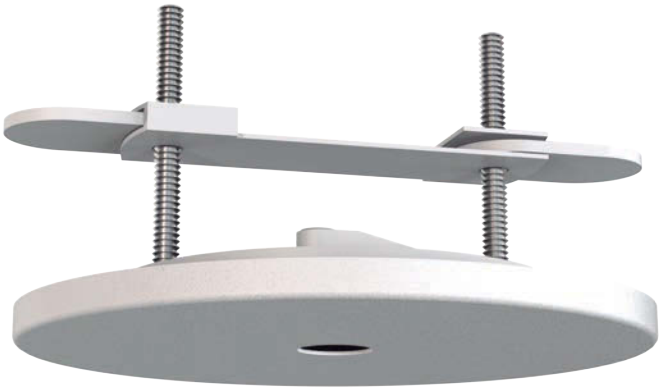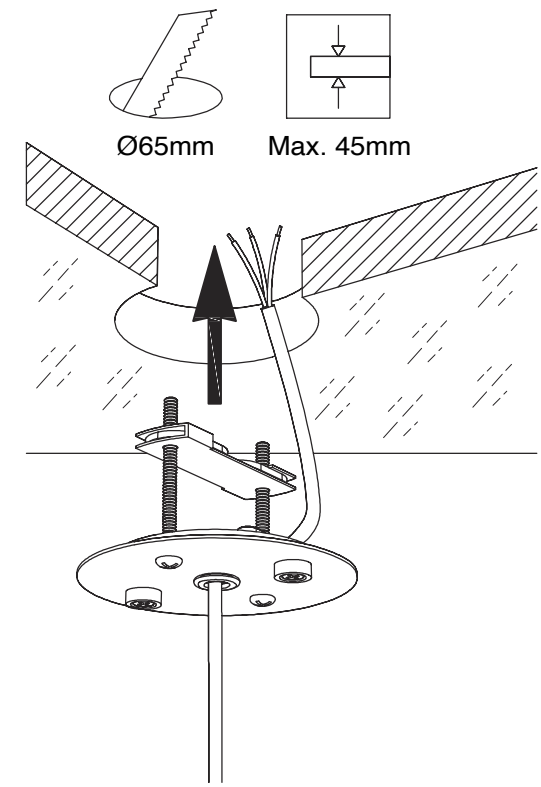

6W



	REFERENCE	K	LED WATT	LUMENS	FINISH
	6540	3000K	6W	620lm	Gris oscuro-Dark grey
	6541	3000K	6W	620lm	Arena blanco-Sand white
New	7813	3000K	8W	830lm	Gris oscuro-Dark grey
New	7814	3000K	8W	830lm	Arena blanco-Sand white
	CREE 	On-off	220-240V ~ 50/60Hz		Aluminio cristal-Aluminium glass




8W






DAVOS DOUBLE 24W

Aplique exterior-Wall light outdoor

Outdoor

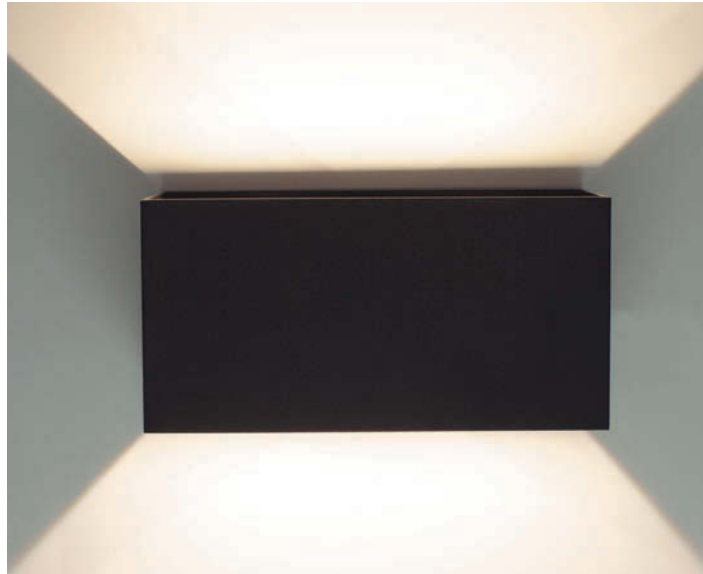


	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7815	3000K	4×6 W	2200lm	Gris oscuro-Dark grey
New	7816	3000K	4×6 W	2200lm	Blanco arena-Sand white
New	7817	3000K	4×6 W	2200lm	Negro arena-Sand black
New	7818	3000K	4×6 W	2200lm	Corten-Corten
New	7819	4000K	4×6 W	2200lm	Gris oscuro-Dark grey
New	7820	4000K	4×6 W	2200lm	Blanco arena-Sand white
New	7821	4000K	4×6 W	2200lm	Negro arena-Sand black
New	7822	4000K	4×6 W	2200lm	Corten-Corten
bridgelux		on-off	220-240V ~ 50/60Hz		Aluminio-Aluminium

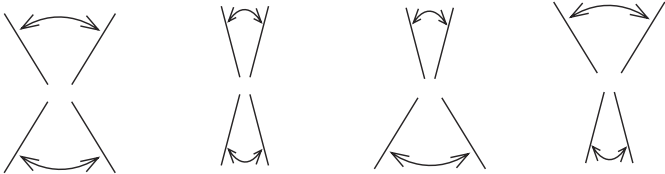





REFERENCE		BULB NO INCLUDED	FINISH
New	7900	GU10	Blanco-White
New	7901	GU10	Gris oscuro-Dark grey
New	7902	GU10	Negro-Black
New	7903	GU10	Corten-Corten
		1x GU10 máx.10W	100-240V~ 50/60Hz Aluminio/Cristal-Aluminium/Glass




REFERENCE		BULB NO INCLUDED	FINISH
New	7904	GU10	Blanco-White
New	7905	GU10	Gris oscuro-Dark grey
New	7906	GU10	Negro-Black
New	7907	GU10	Corten-Corten
		1x GU10 máx.10W	100-240V~ 50/60Hz Aluminio/Cristal-Aluminium/Glass




Bombillas recomendadas-Suggested bulbs

REFERENCE	Wattios LED	CCT	Lumens	Ángulo luz
R09196	6W	3000K	520lm	110°
R09214	6W	4000K	540lm	110°
R09197	6W	5000K	540lm	110°





	REFERENCE	BULB NO INCLUDED	FINISH
New	7908	E27	Gris Oscuro-Dark Grey
		1x E27 máx.20W	100-240V~ 50/60Hz Aluminio/Cristal-Aluminium/Glass






Bombillas recomendadas-Suggested bulbs

	REFERENCE	Wattios LED	CCT	Lumens	Ángulo luz
→	R09133	10W	3000K	1050lm	320°
→	R09215	10W	4000K	1080lm	320°
→	R09134	10W	5000K	1100lm	320°
→	R09139	15W	3000K	1460lm	240°
→	R09140	15W	4000K	1510lm	240°








	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7930	3000K	2W	180lm	Blanco-White
New	7931	3000K	2W	180lm	Negro-Black
New	7932	3000K	2W	180lm	Corten-Corten
			DC 5V / 1A		Aluminio-Aluminium

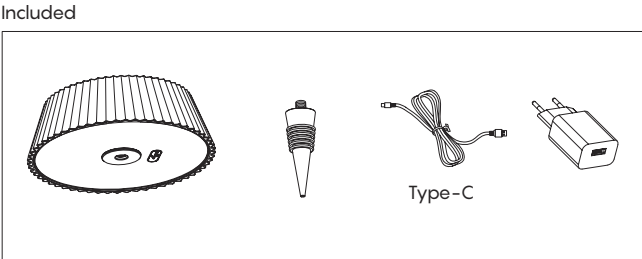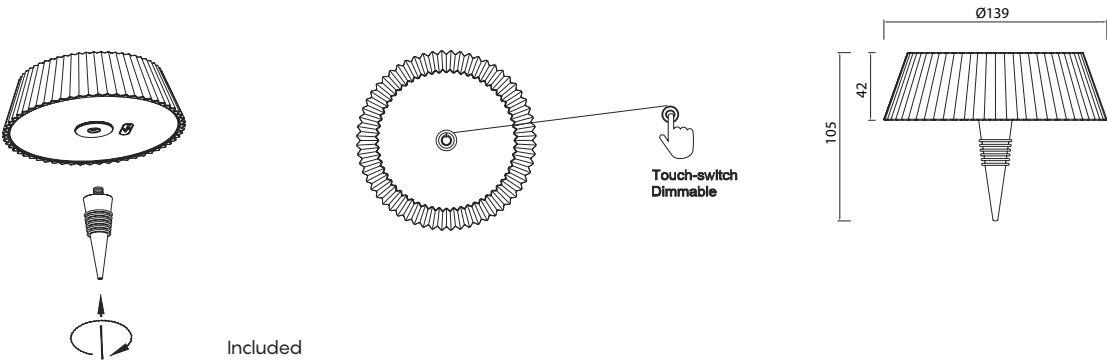



	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7933	3000K	2W	180lm	Blanco-White
New	7934	3000K	2W	180lm	Negro-Black
New	7935	3000K	2W	180lm	Corten-Corten
			DC 5V / 1A		Aluminio-Aluminium

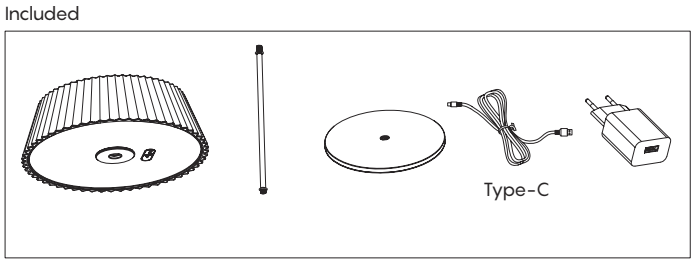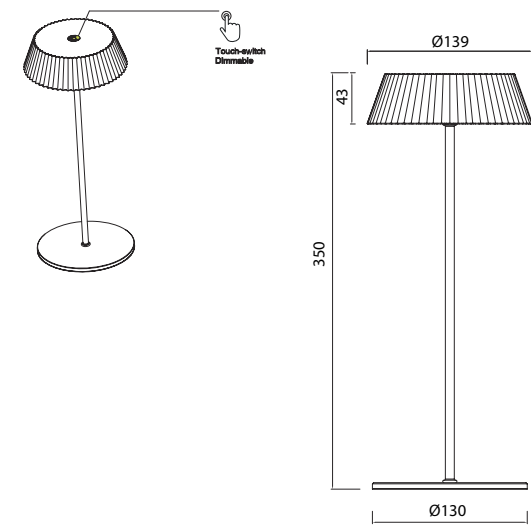

Índice de referencias
References index

Referencia Reference	Pág Pag.	Referencia Reference	Pág Pag.
6080	6	7844	14
6081	6	7845	15
6082	6	7846	15
6083	6	7847	15
6230	8	7848	15
6400	10	7849	15
6401	10	7850	15
6402	10	7851	15
6403	10	7852	15
6540	20	7853	6
6541	20	7854	6
7216	15	7855	18
7217	15	7856	18
7218	15	7857	18
7451	12	7858	18
7452	12	7859	18
7453	12	7900	24
7454	12	7901	24
7460	8	7902	24
7813	20	7903	24
7814	20	7904	25
7815	22	7905	25
7816	22	7906	25
7817	22	7907	25
7818	22	7908	26
7819	22	7910	4
7820	22	7911	4
7821	22	7912	4
7822	22	7913	4
7823	6	7914	4
7824	6	7915	4
7825	6	7930	28
7826	6	7931	28
7827	12	7932	28
7828	12	7933	30
7829	10	7934	30
7830	10	7935	30
7831	10	R09196	24
7832	10	R09196	14
7833	10	R09197	24
7834	10	R09197	14
7840	8	R09214	24
7841	8	R09214	14
7843	14		

Carriles monofásico Single-phase tracks	Pág Pag.
GB112	16
GB113	16
GB122	16
GB123	16
GB142	17
GB143	17
GB21002	16
GB21003	16
GB212	17
GB213	17
GB22002	16
GB22003	16
GB242	17
GB243	17
GB342	17
GB343	17
GB352	17
GB353	17
GB412	16
GB413	16
GBF102	17
GBF103	17
GBF21002	16
GBF21003	16
GBF22002	16
GBF22003	16
GBF302	17
GBF303	17